




## TECHNICAL SPECIFICATIONS

### Belt Drive Centrifugal Wheels CL-1020 Series

Double inlet – Forward curved

- Centrifugal wheel material - galvaneal (satin coat)
- Wheels equipped with two coaxial hubs
- Wheel OD concentric with bore within .060 T.I.R.
- Maximum wheel OD run out .060 T.I.R. axially
- Wheels are dynamically balanced within .075 oz.in.
- Standard hub bore 3/4". Other bore sizes available.
- Number of blades: 48

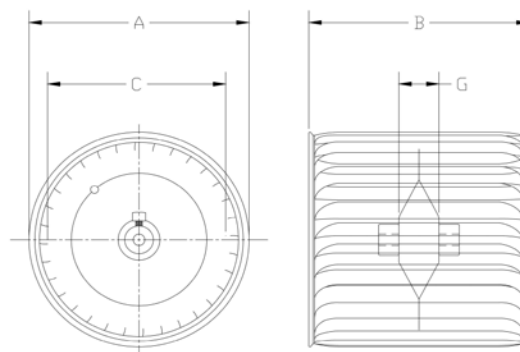

CL wheel

| Model          | Std. hub bore | Alt. bore sizes | Max RPM | Weight, lbs | Dim A | Dim B | Dim C | Dim G |
|----------------|---------------|-----------------|---------|-------------|-------|-------|-------|-------|
| CL 1020-416-5  | 0.75          | .875 / 1        | 1800    | 3.50        | 10.63 | 4.50  | 8.88  | 2.13  |
| CL 1020-600-5  | 0.75          | .875 / 1        | 1800    | 4.00        | 10.63 | 6.00  | 8.88  | 2.13  |
| CL 1020-704-5  | 0.75          | .875 / 1        | 1800    | 4.50        | 10.63 | 7.13  | 8.88  | 2.13  |
| CL 1020-800-5  | 0.75          | .875 / 1        | 1800    | 4.75        | 10.63 | 8.00  | 8.88  | 2.13  |
| CL 1020-916-5  | 0.75          | .875 / 1        | 1600    | 5.75        | 10.63 | 9.50  | 8.88  | 2.13  |
| CL 1020-1020-5 | 0.75          | .875 / 1        | 1600    | 6.00        | 10.63 | 10.63 | 8.88  | 2.13  |