



Model: 709
Max. HP: 1-1/2
Shaft dia.: 3/4"
Max. RPM: 1600

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

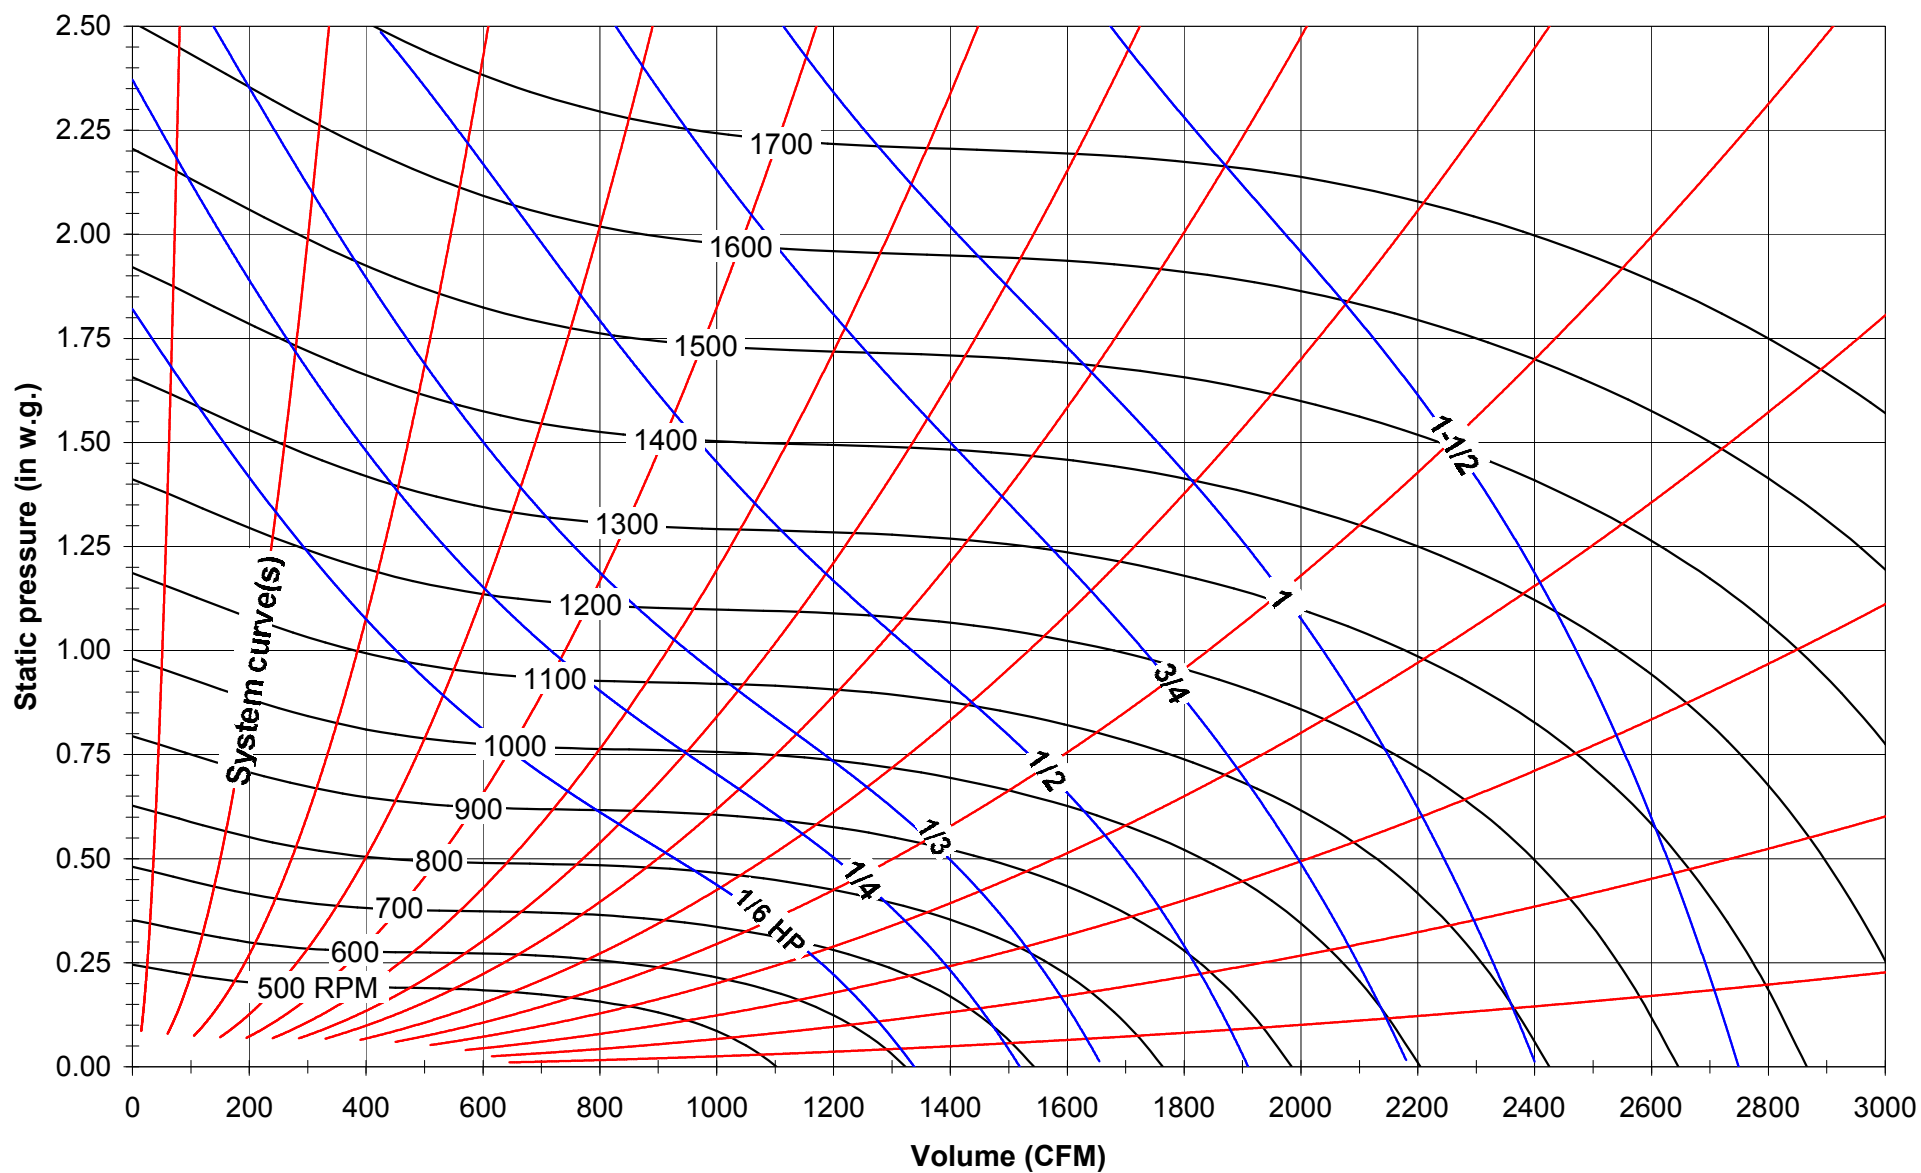


Model: 710
Max. HP: 1-1/2
Shaft dia.: 3/4"
Max. RPM: 1600

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

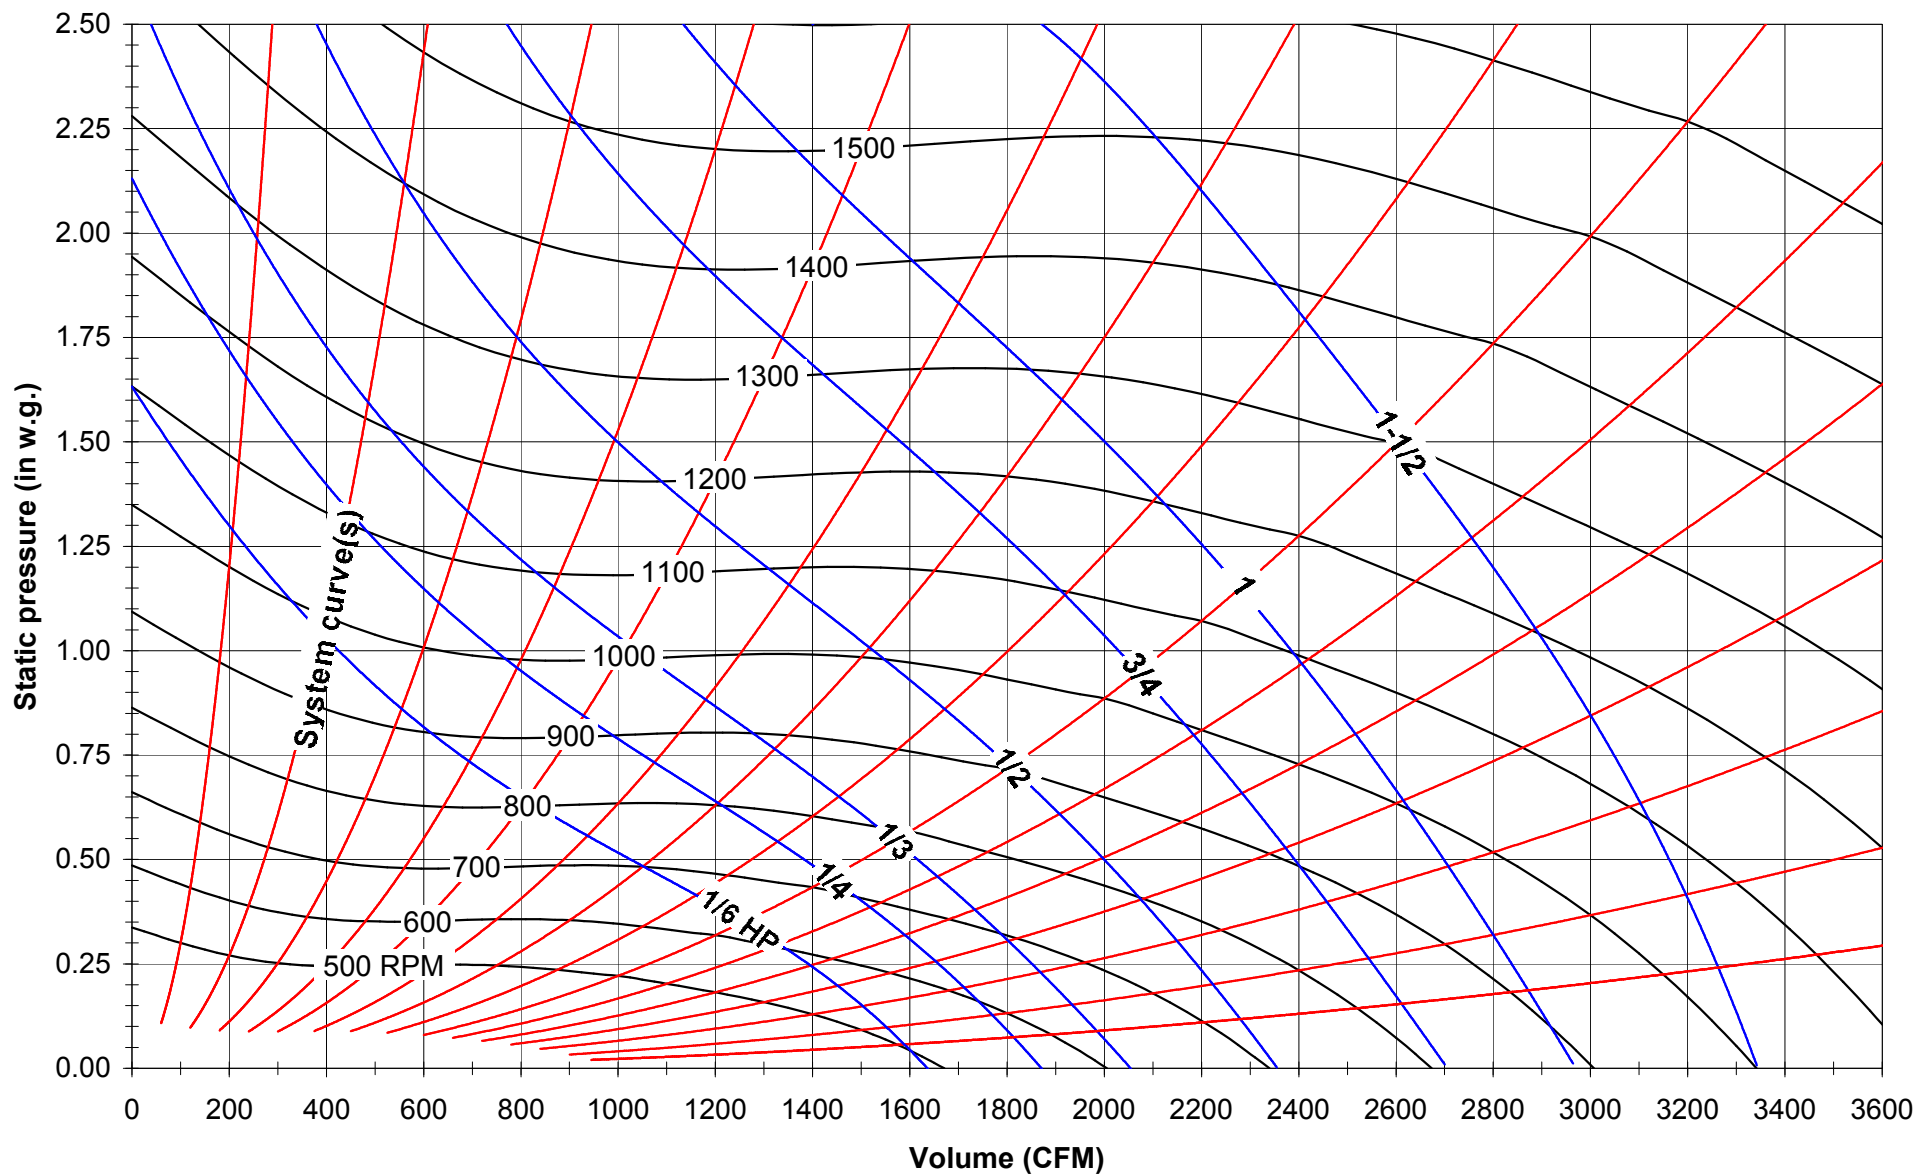


Model: 712
Max. HP: 2
Shaft dia.: 3/4"
Max. RPM: 1500

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

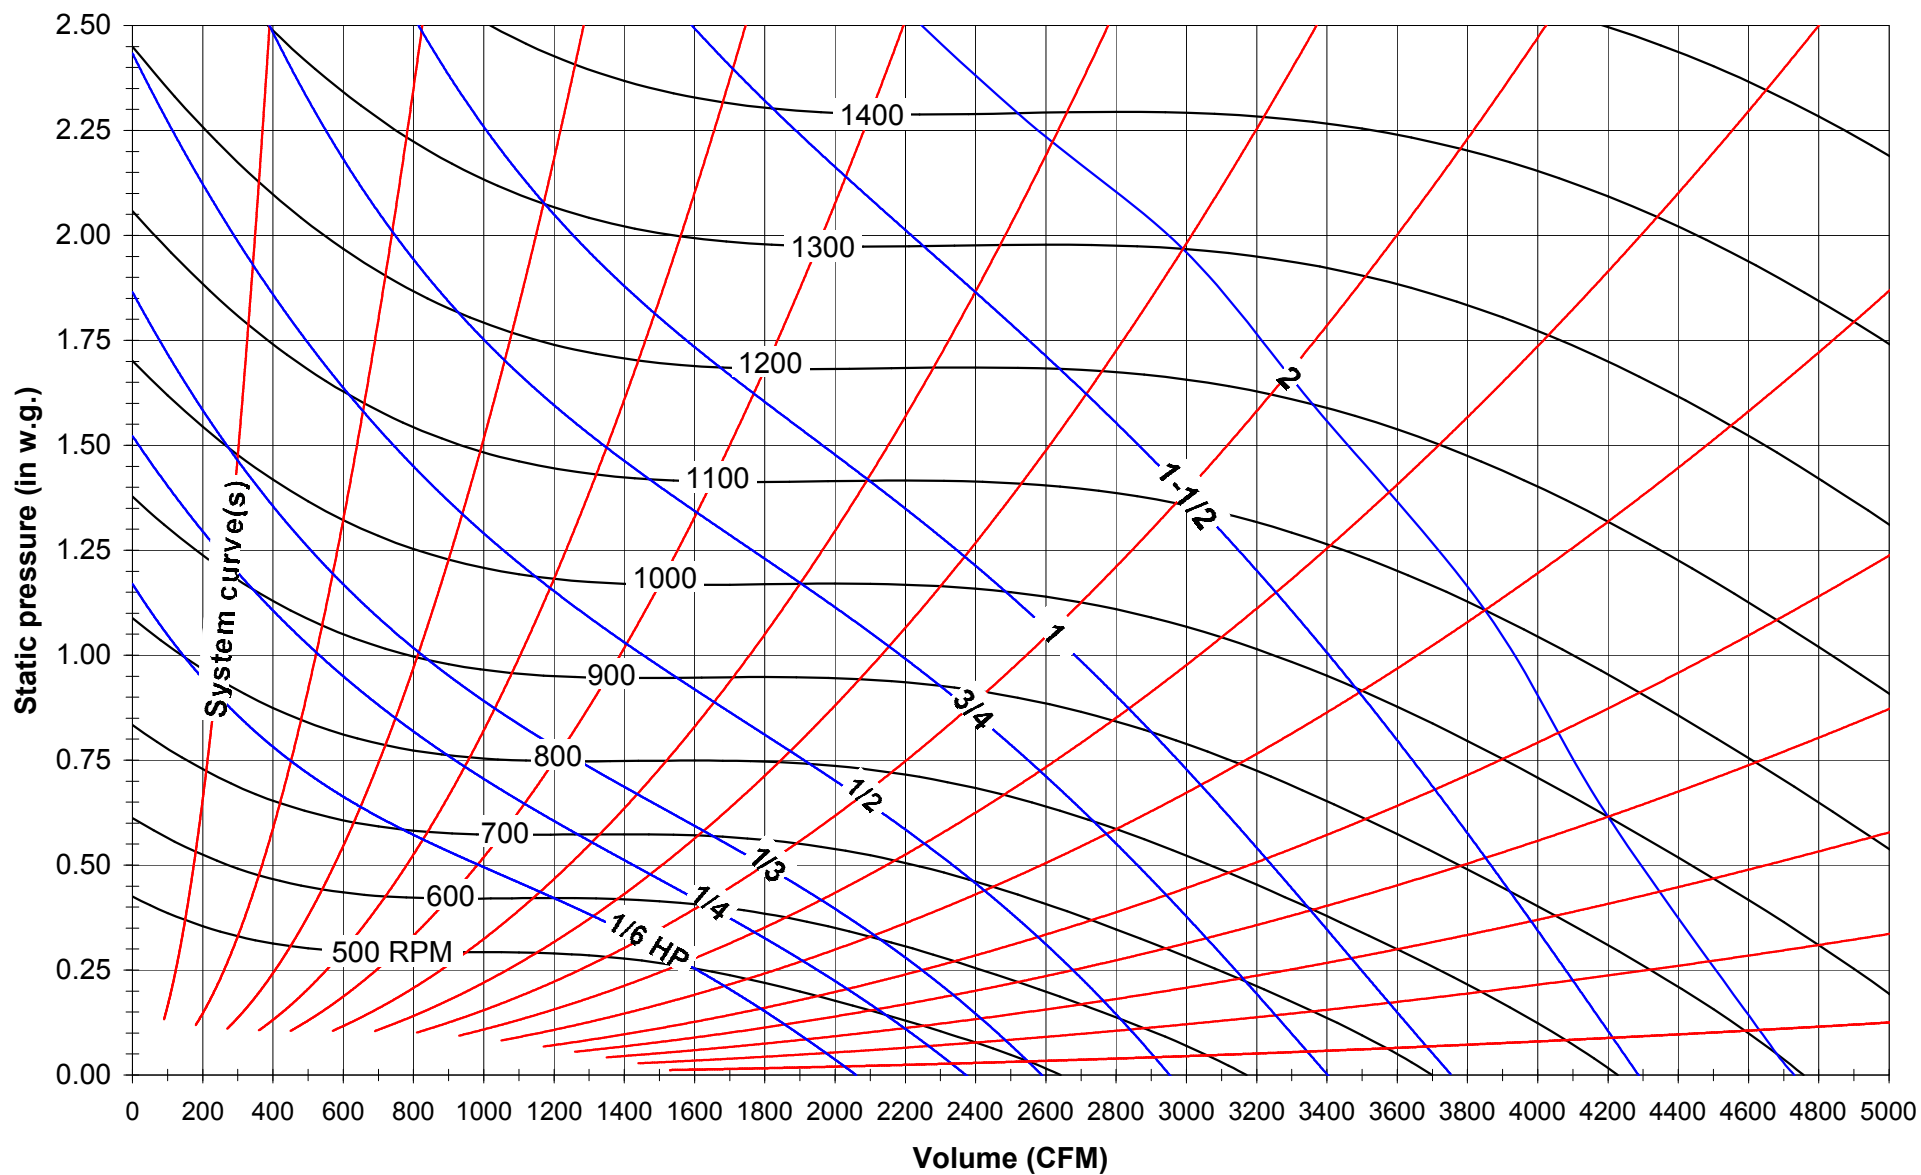

Model: 715
Max. HP: 3
Shaft dia.: 1"
Max. RPM: 1200

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

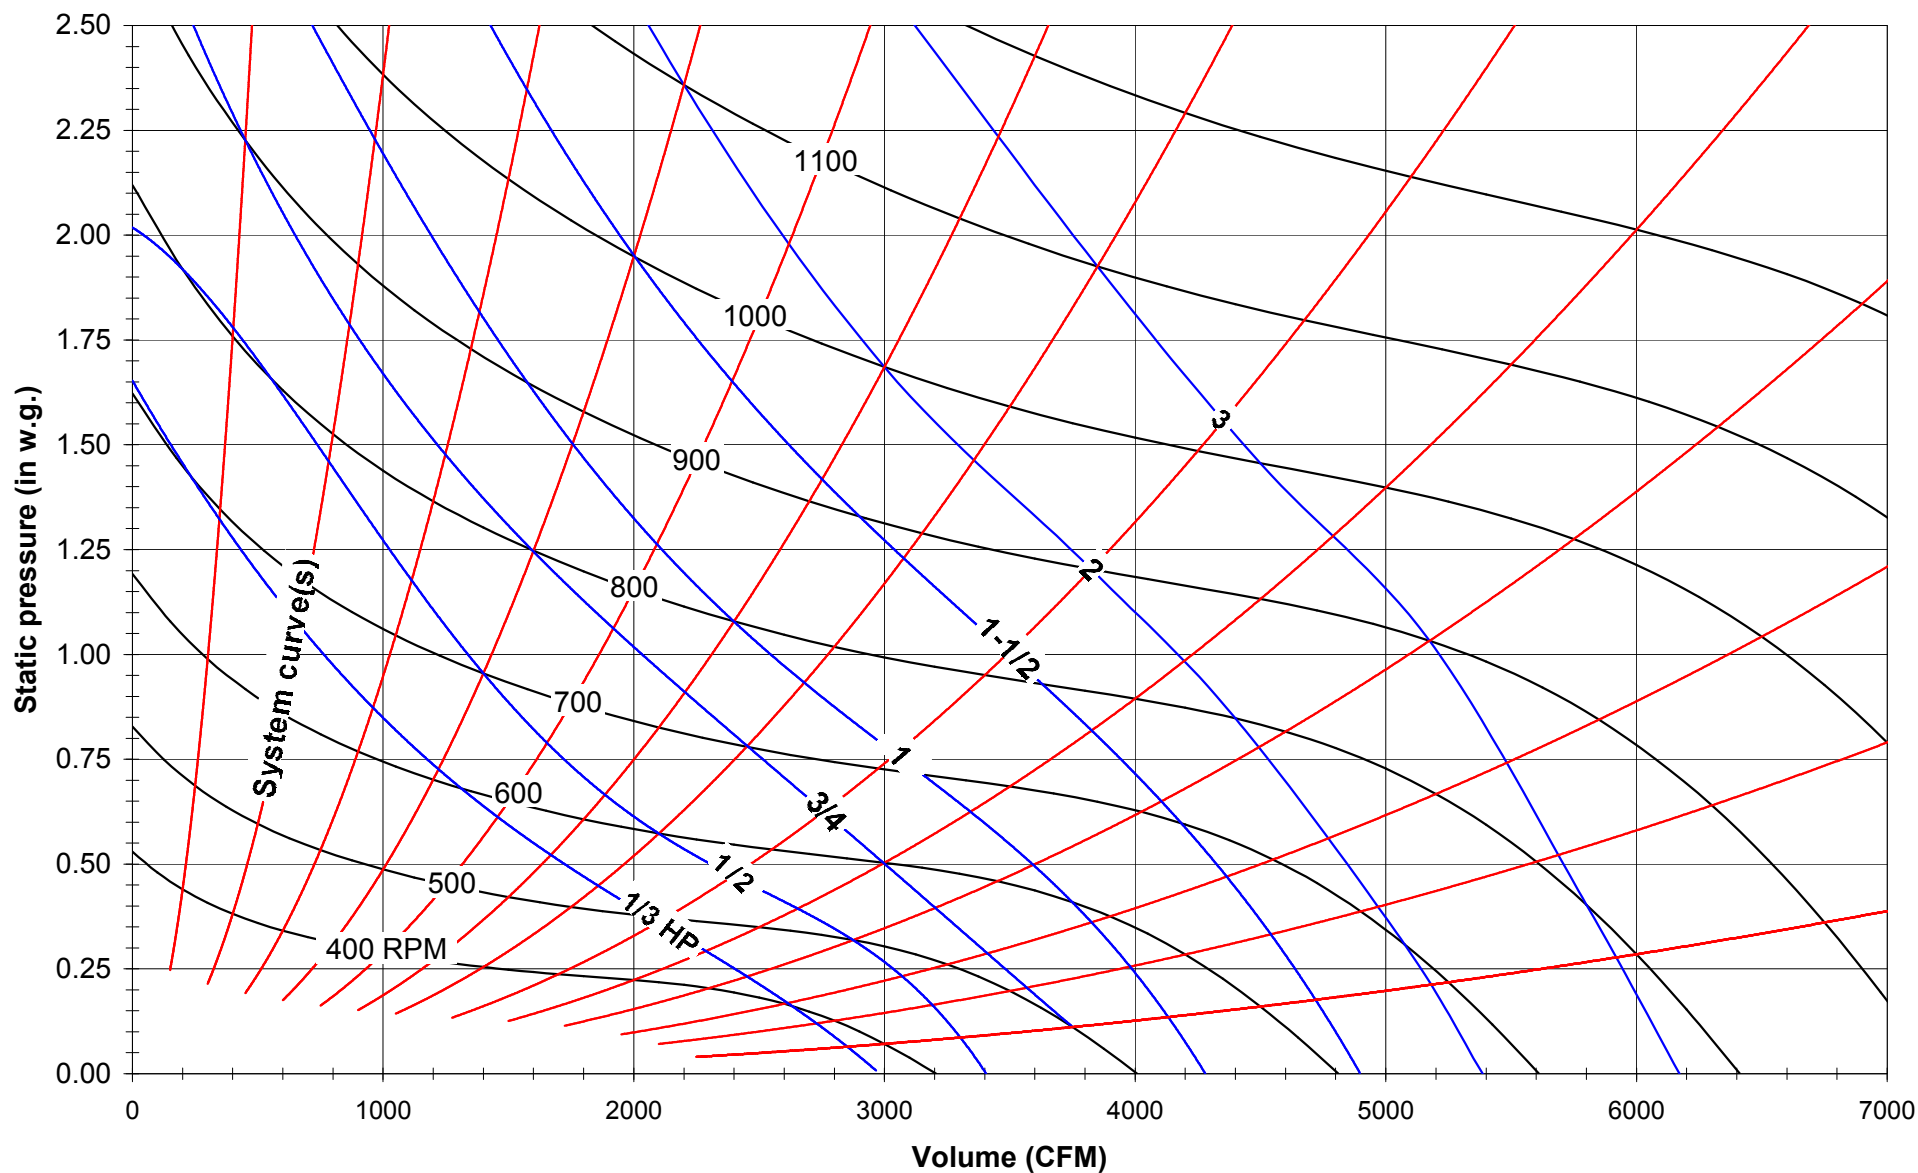

Model: 718
Max. HP: 5
Shaft dia.: 1"
Max. RPM: 1200

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

