



**Model: 307**  
**Max. HP: 3/4**  
**Shaft dia.: 3/4"**  
**Max. RPM: 1600**

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.  
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.  
BHP does not include drive losses. Standard Air Density .075 lb/ft<sup>3</sup>.

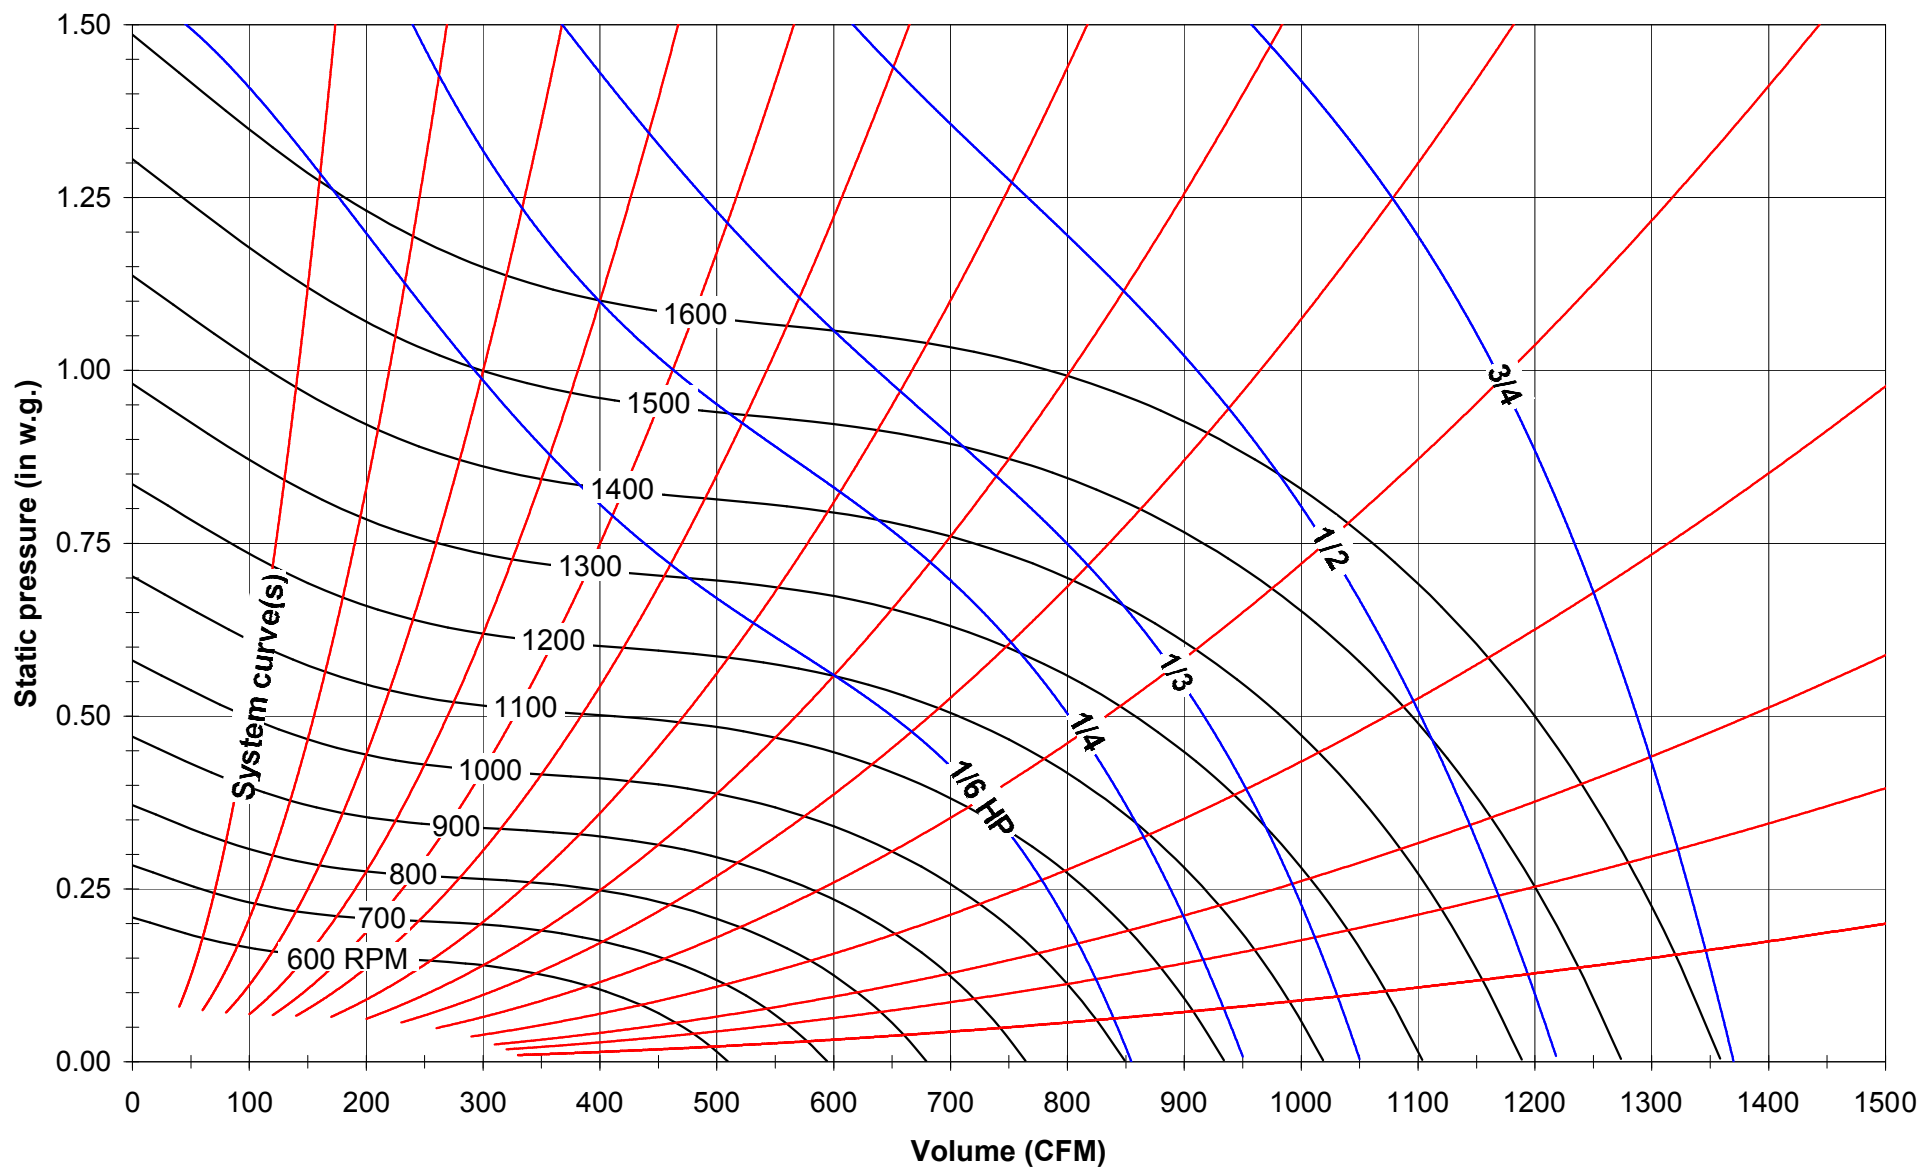


**Model: 309**  
**Max. HP: 3/4**  
**Shaft dia.: 3/4"**  
**Max. RPM: 1600**

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.  
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.  
BHP does not include drive losses. Standard Air Density .075 lb/ft<sup>3</sup>.

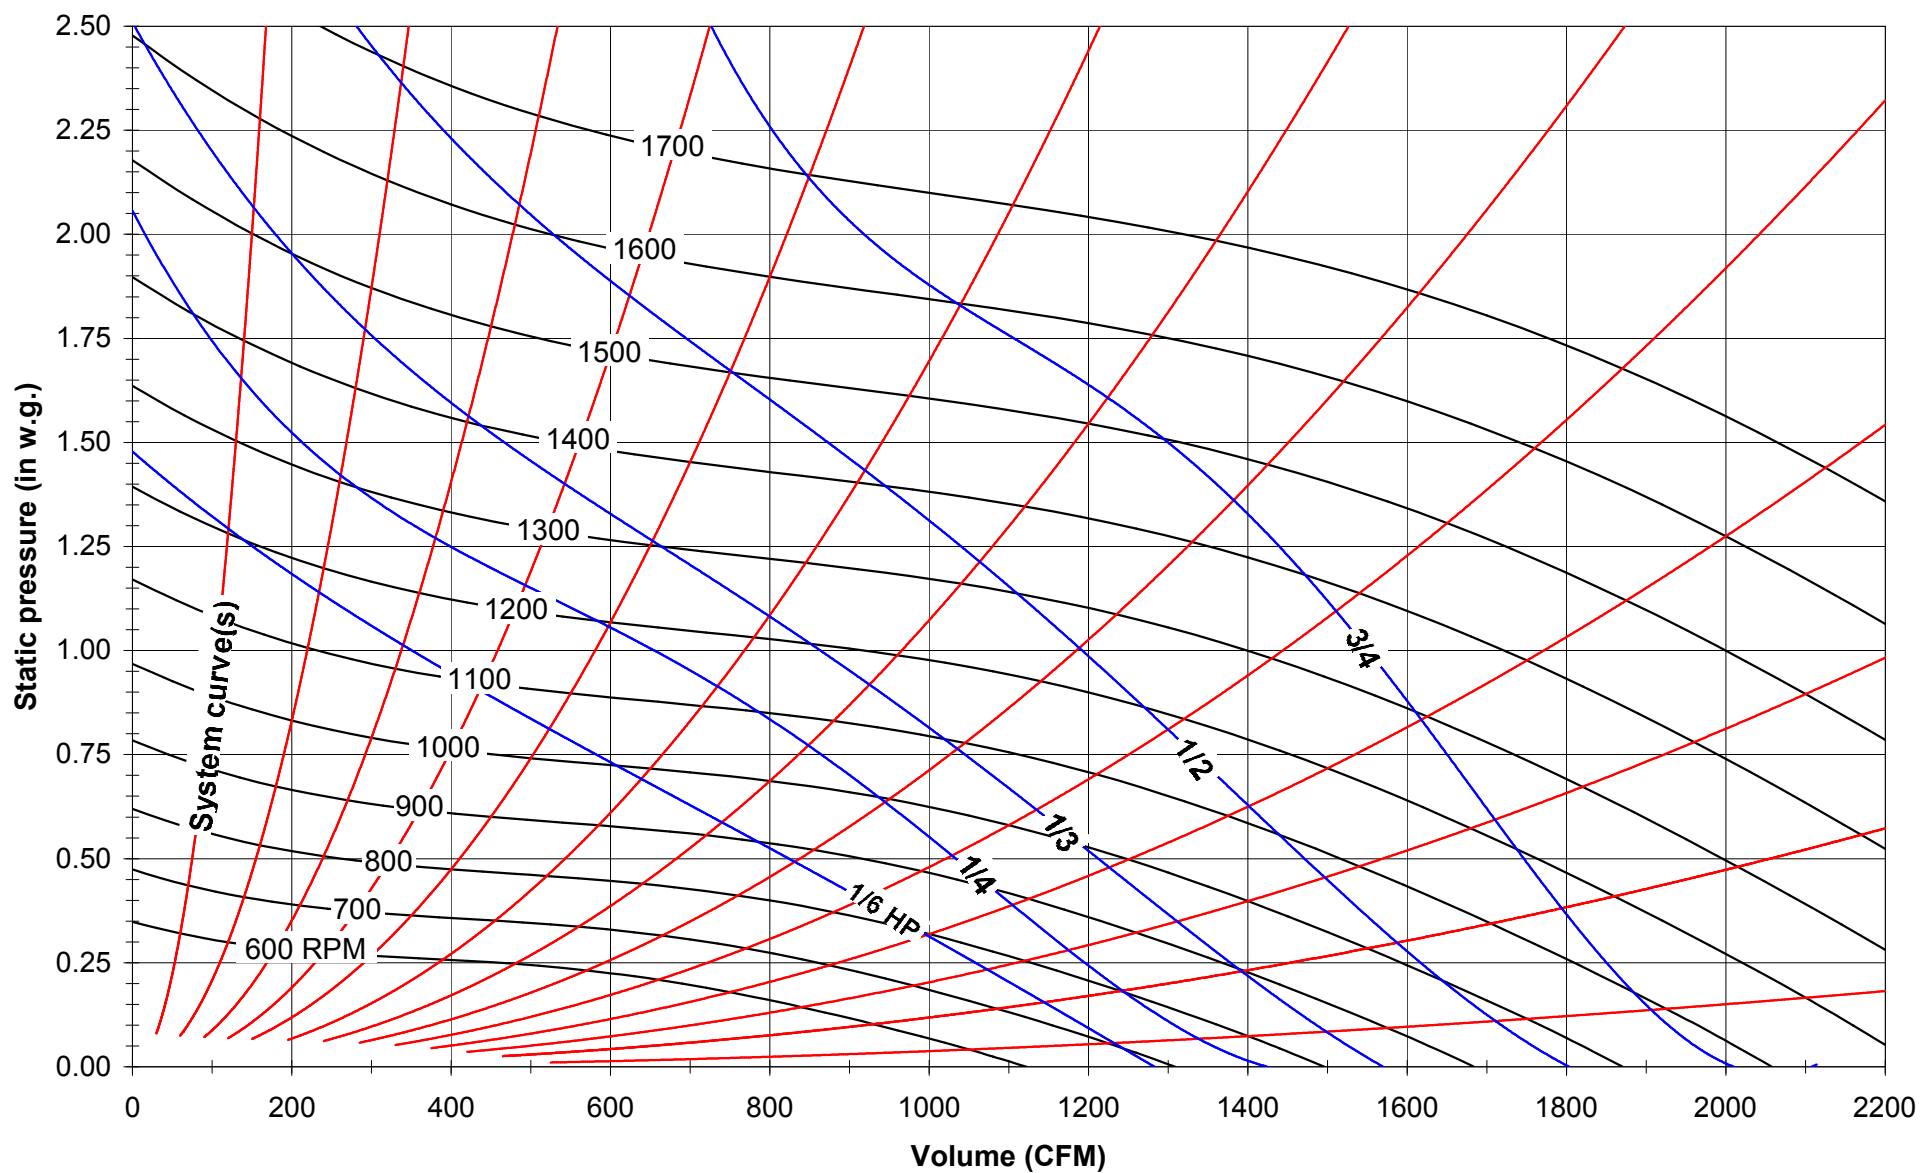


**Model: 310**  
**Max. HP: 1-1/2**  
**Shaft dia.: 3/4"**  
**Max. RPM: 1600**

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.  
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.  
BHP does not include drive losses. Standard Air Density .075 lb/ft<sup>3</sup>.

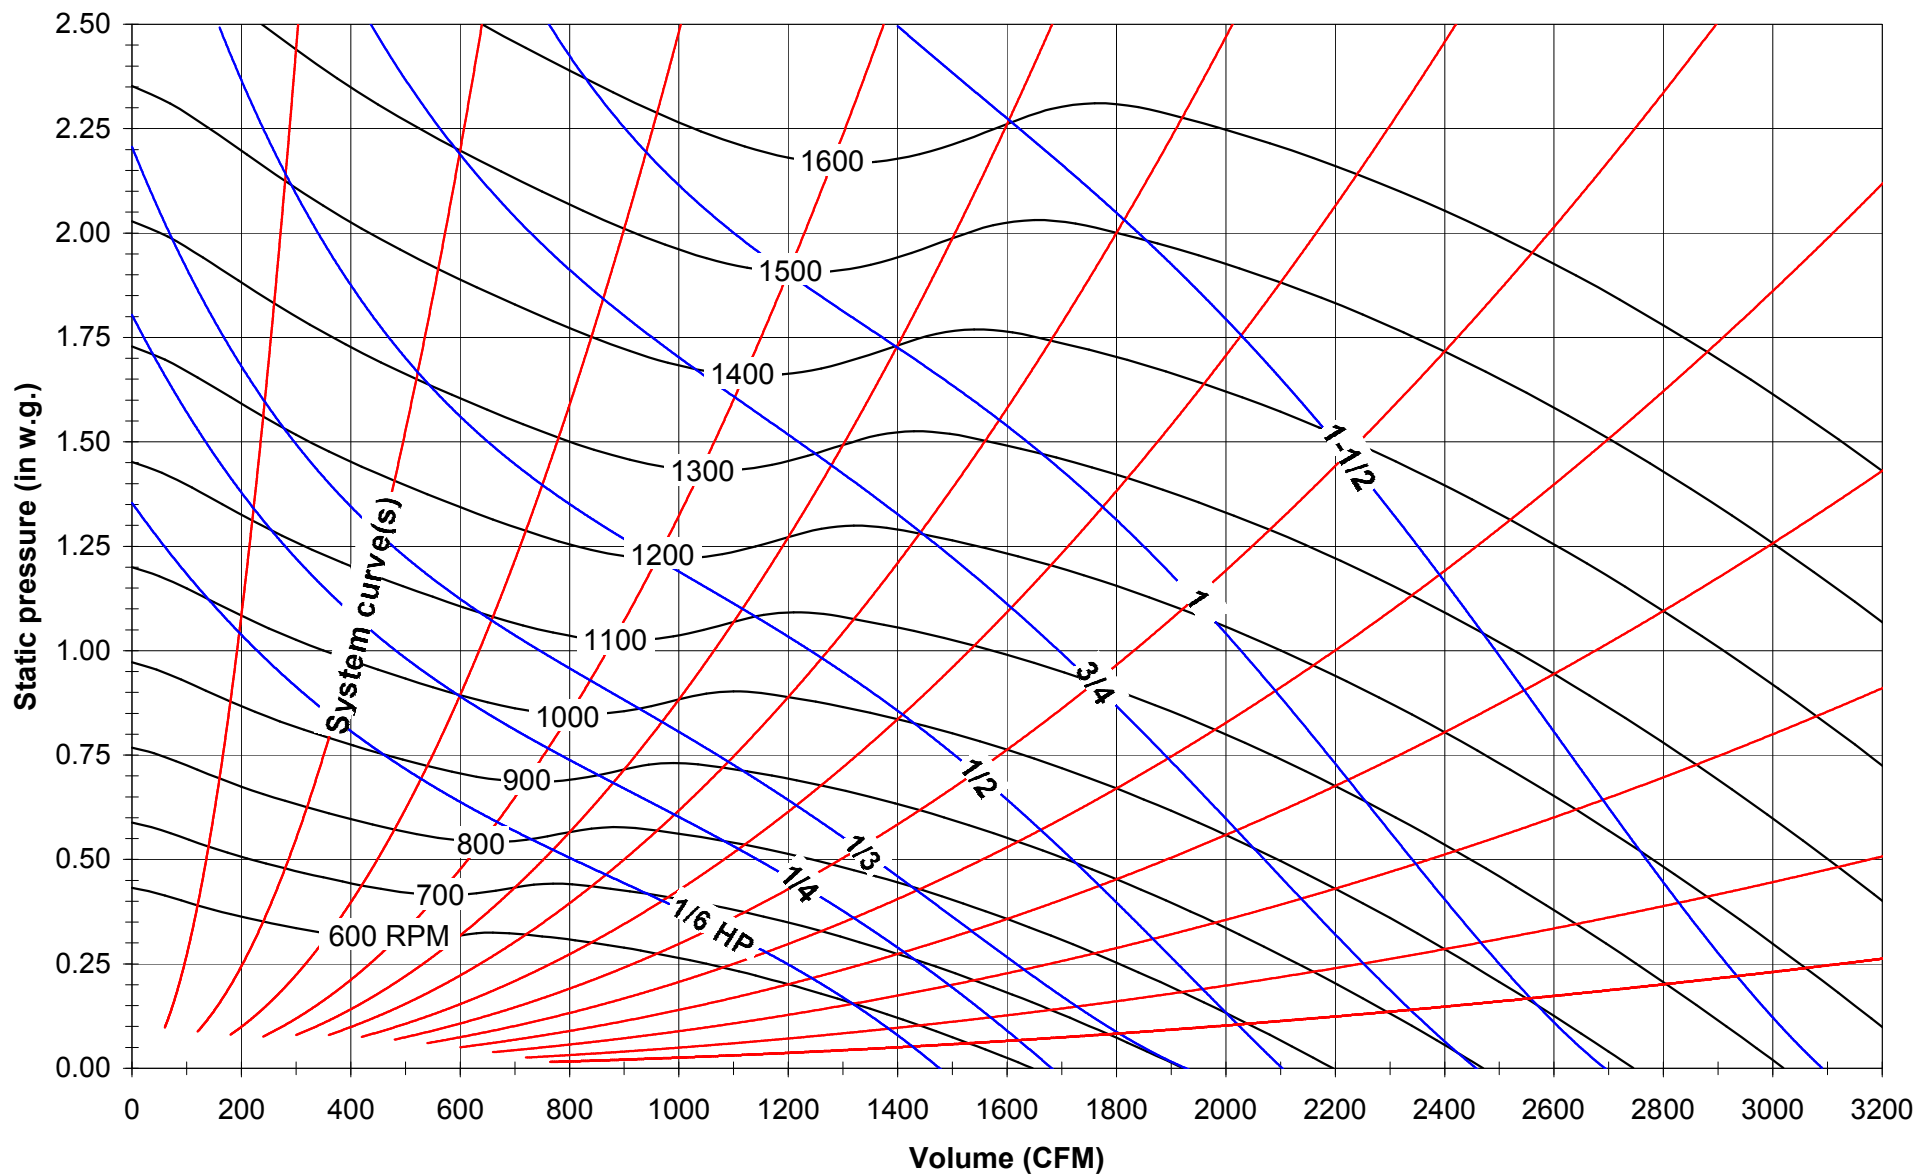


**Model: 312**  
**Max. HP: 2**  
**Shaft dia.: 3/4"**  
**Max. RPM: 1500**

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.  
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.  
BHP does not include drive losses. Standard Air Density .075 lb/ft<sup>3</sup>.

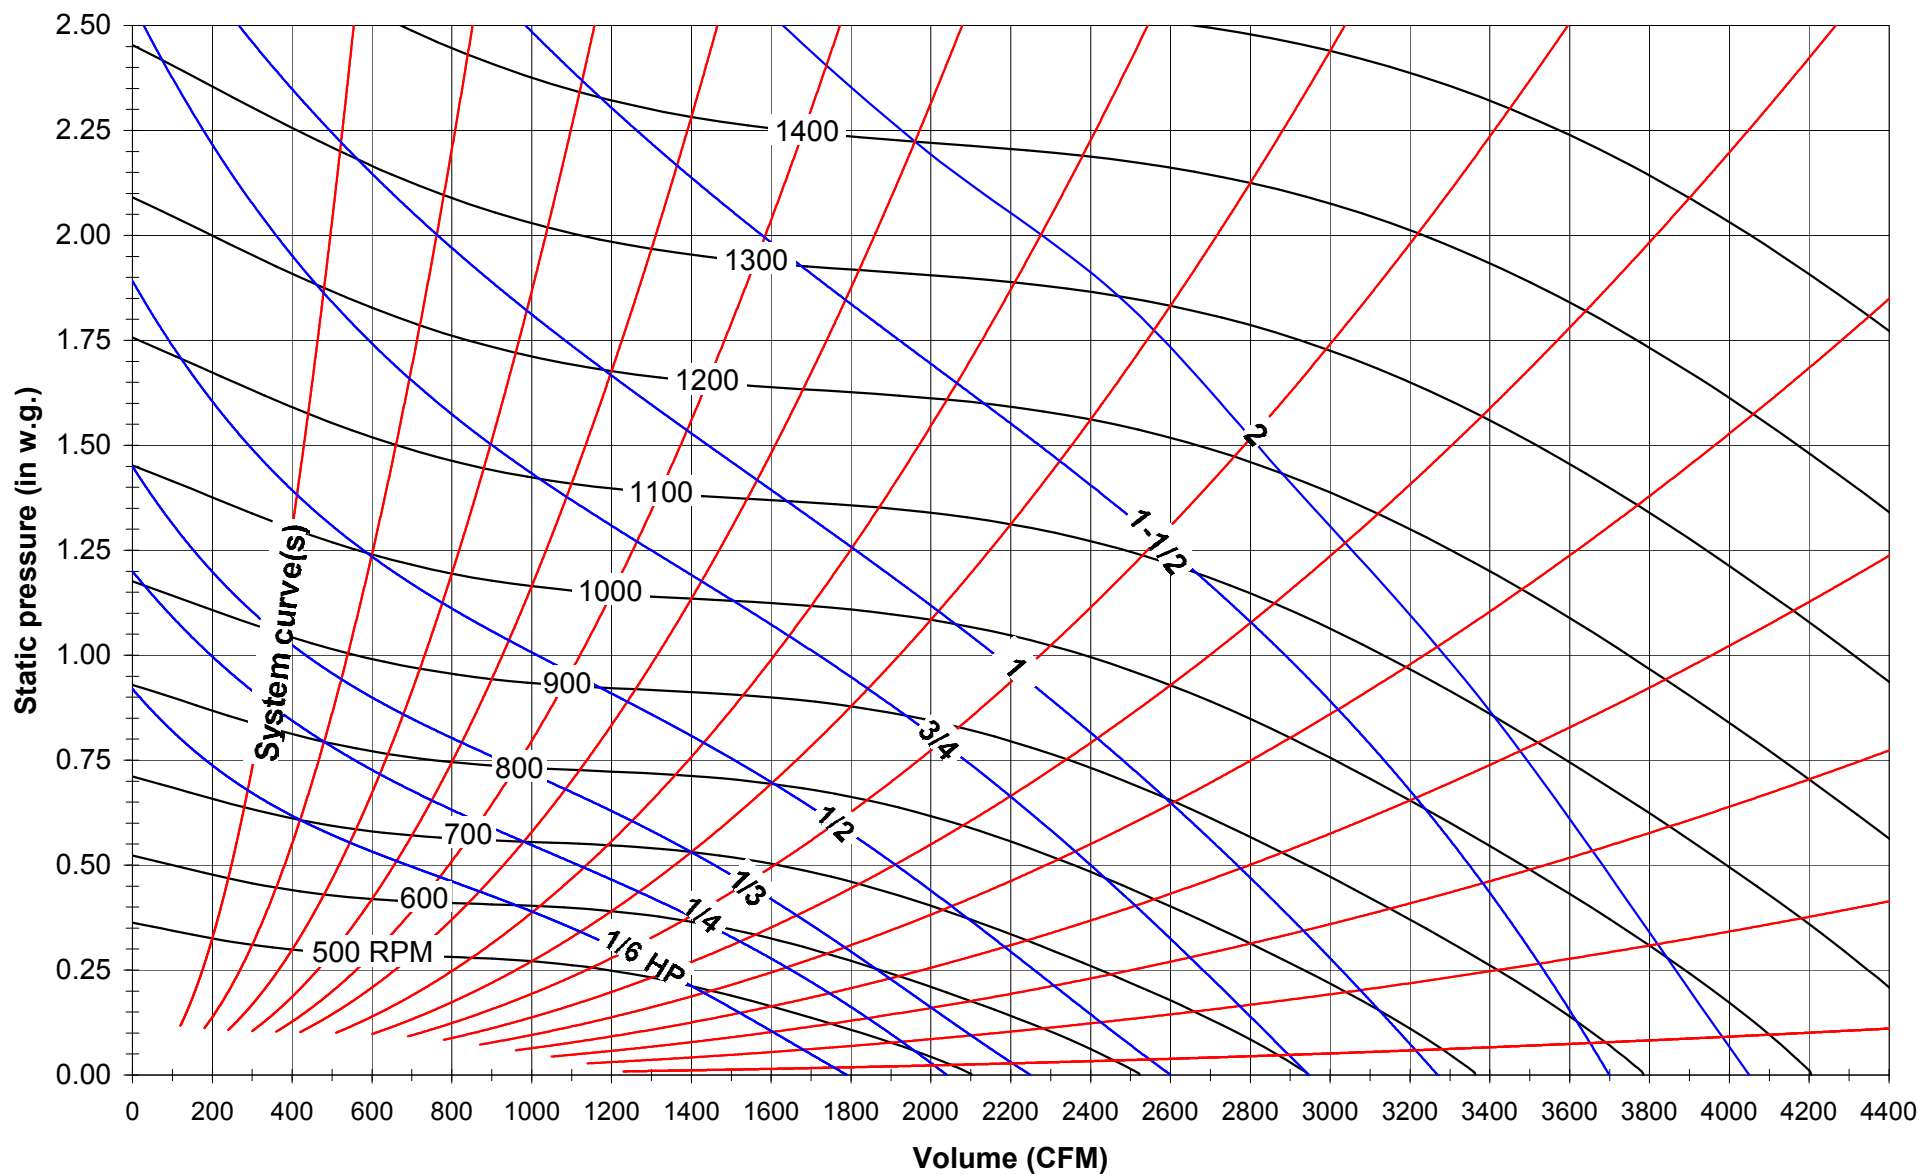

**Model: 315**  
**Max. HP: 3**  
**Shaft dia.: 1"**  
**Max. RPM: 1200**

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.  
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.  
BHP does not include drive losses. Standard Air Density .075 lb/ft<sup>3</sup>.

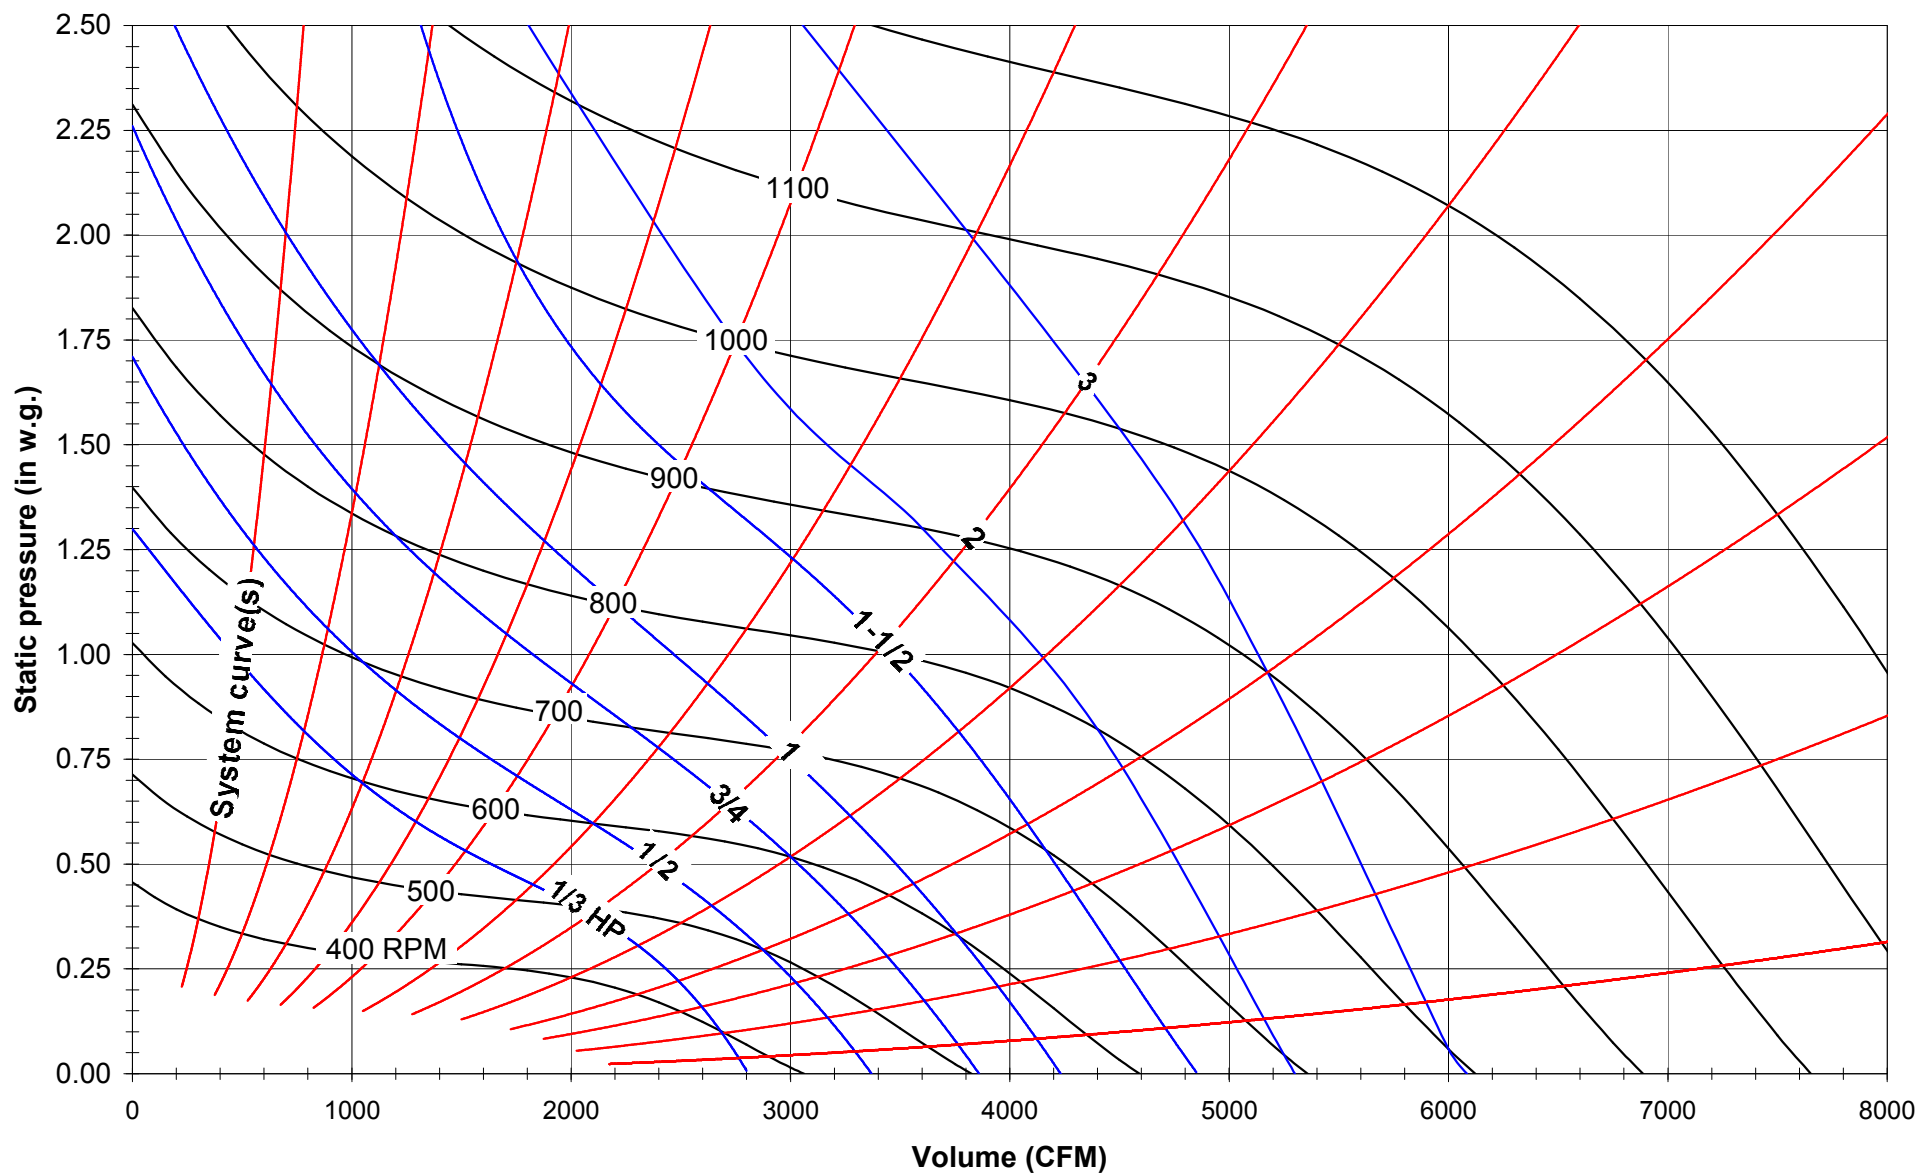

**Model: 318**  
**Max. HP: 5**  
**Shaft dia.: 1"**  
**Max. RPM: 1200**

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.  
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.  
BHP does not include drive losses. Standard Air Density .075 lb/ft<sup>3</sup>.

