



Model: 407
Max. HP: 1
Shaft dia.: 3/4"
Max. RPM: 2800

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

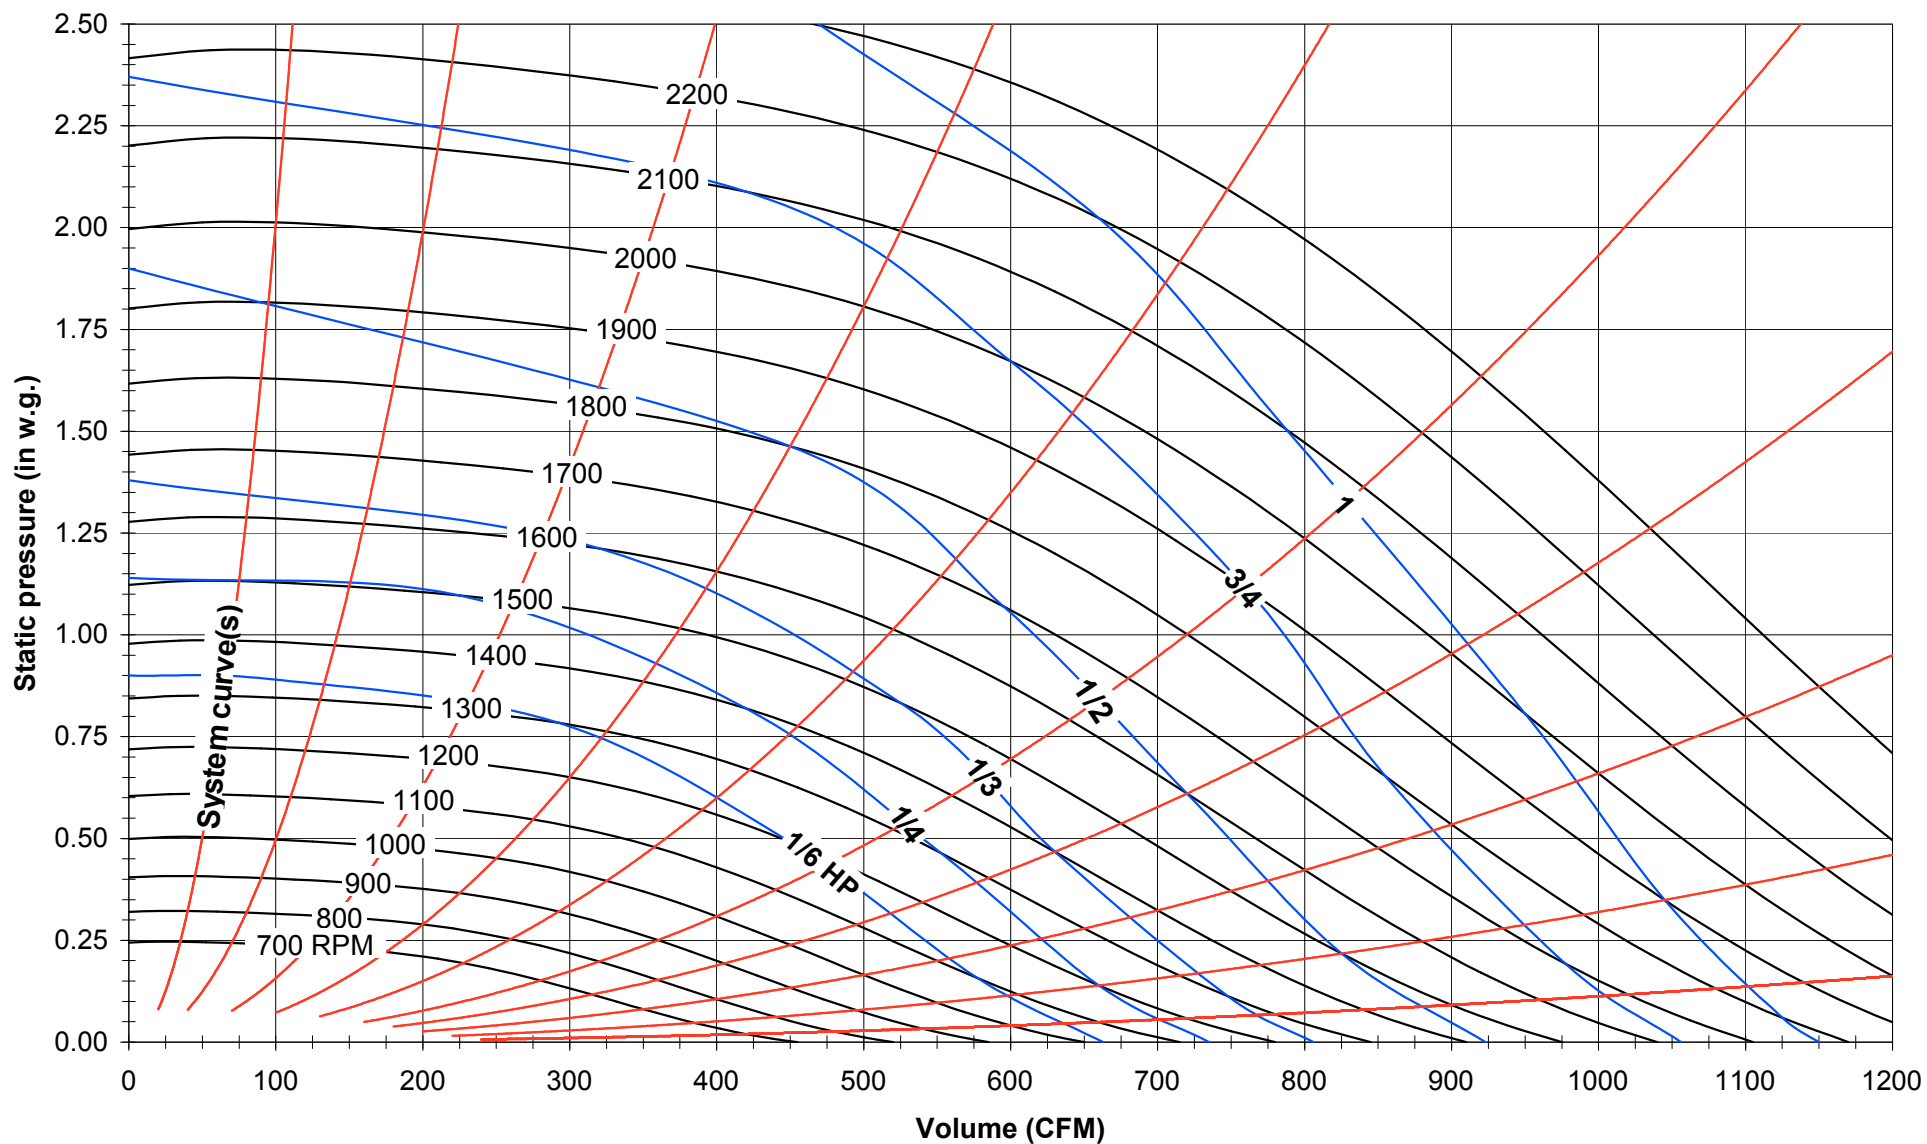


Model: 409
Max. HP: 2
Shaft dia.: 3/4"
Max. RPM: 2200

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

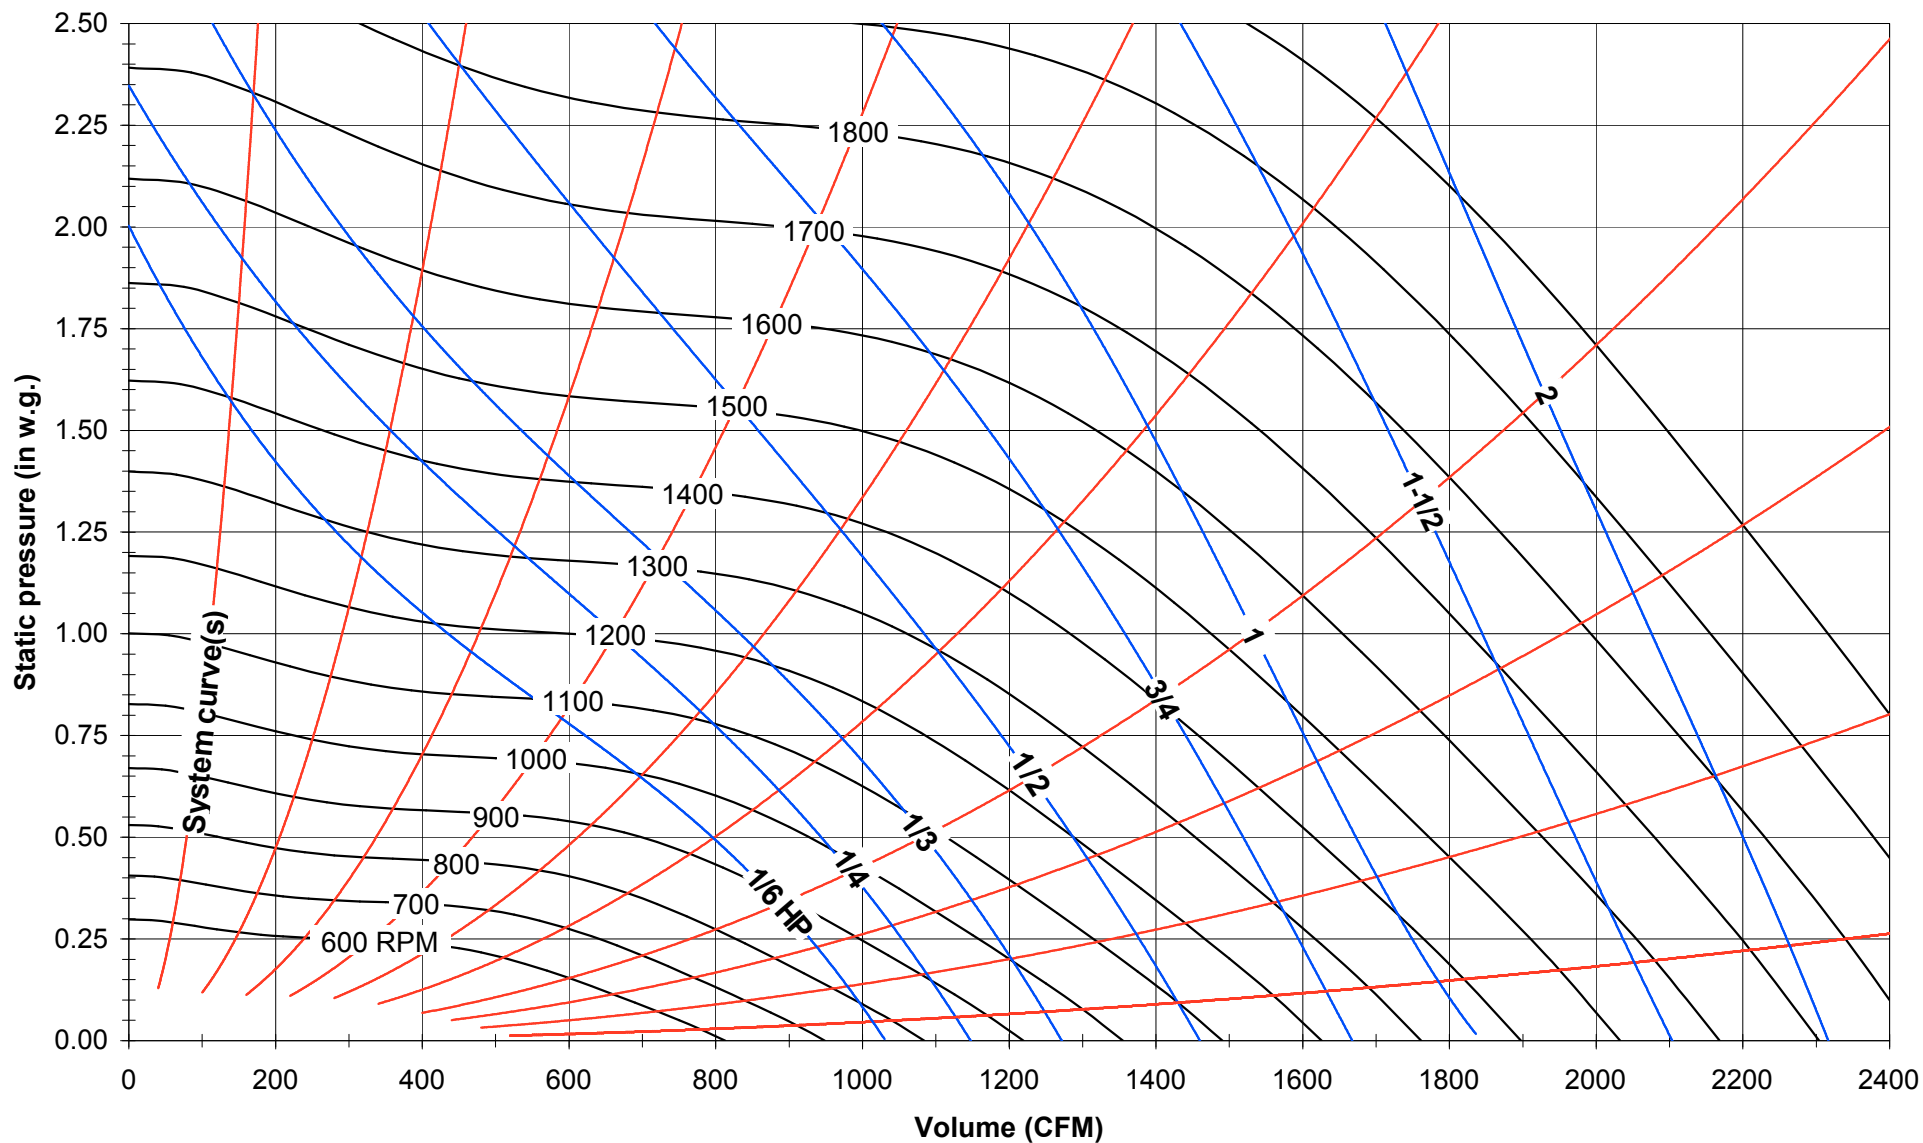


| | | |
|-------------|-------------|-------------|
| Model: | 410 | 610 |
| Max. HP: | 2 | 2 |
| Shaft dia.: | 3/4" | 3/4" |
| Max. RPM: | 2000 | 2000 |

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

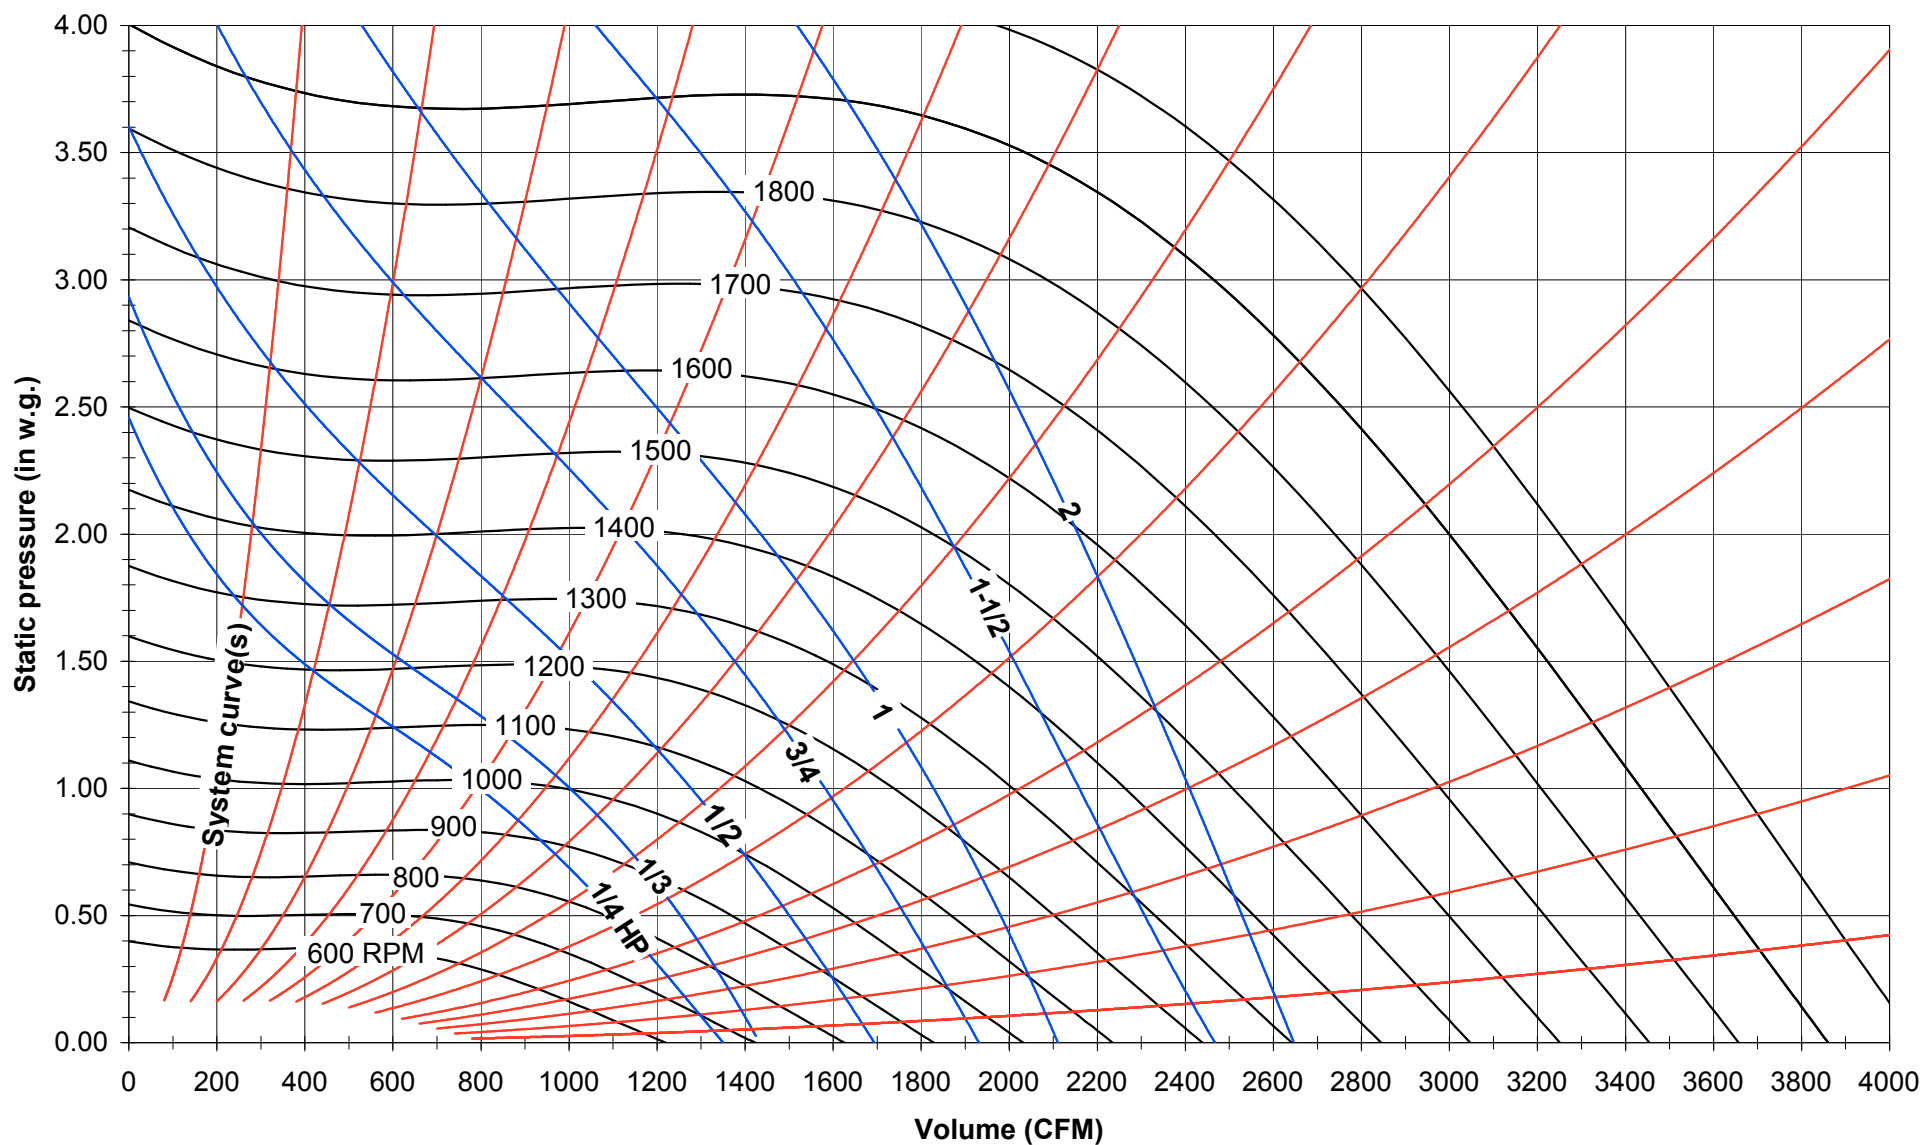

| | | |
|-------------|-------------|-------------|
| Model: | 412 | 612 |
| Max. HP: | 2 | 2 |
| Shaft dia.: | 3/4" | 3/4" |
| Max. RPM: | 1600 | 1600 |

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

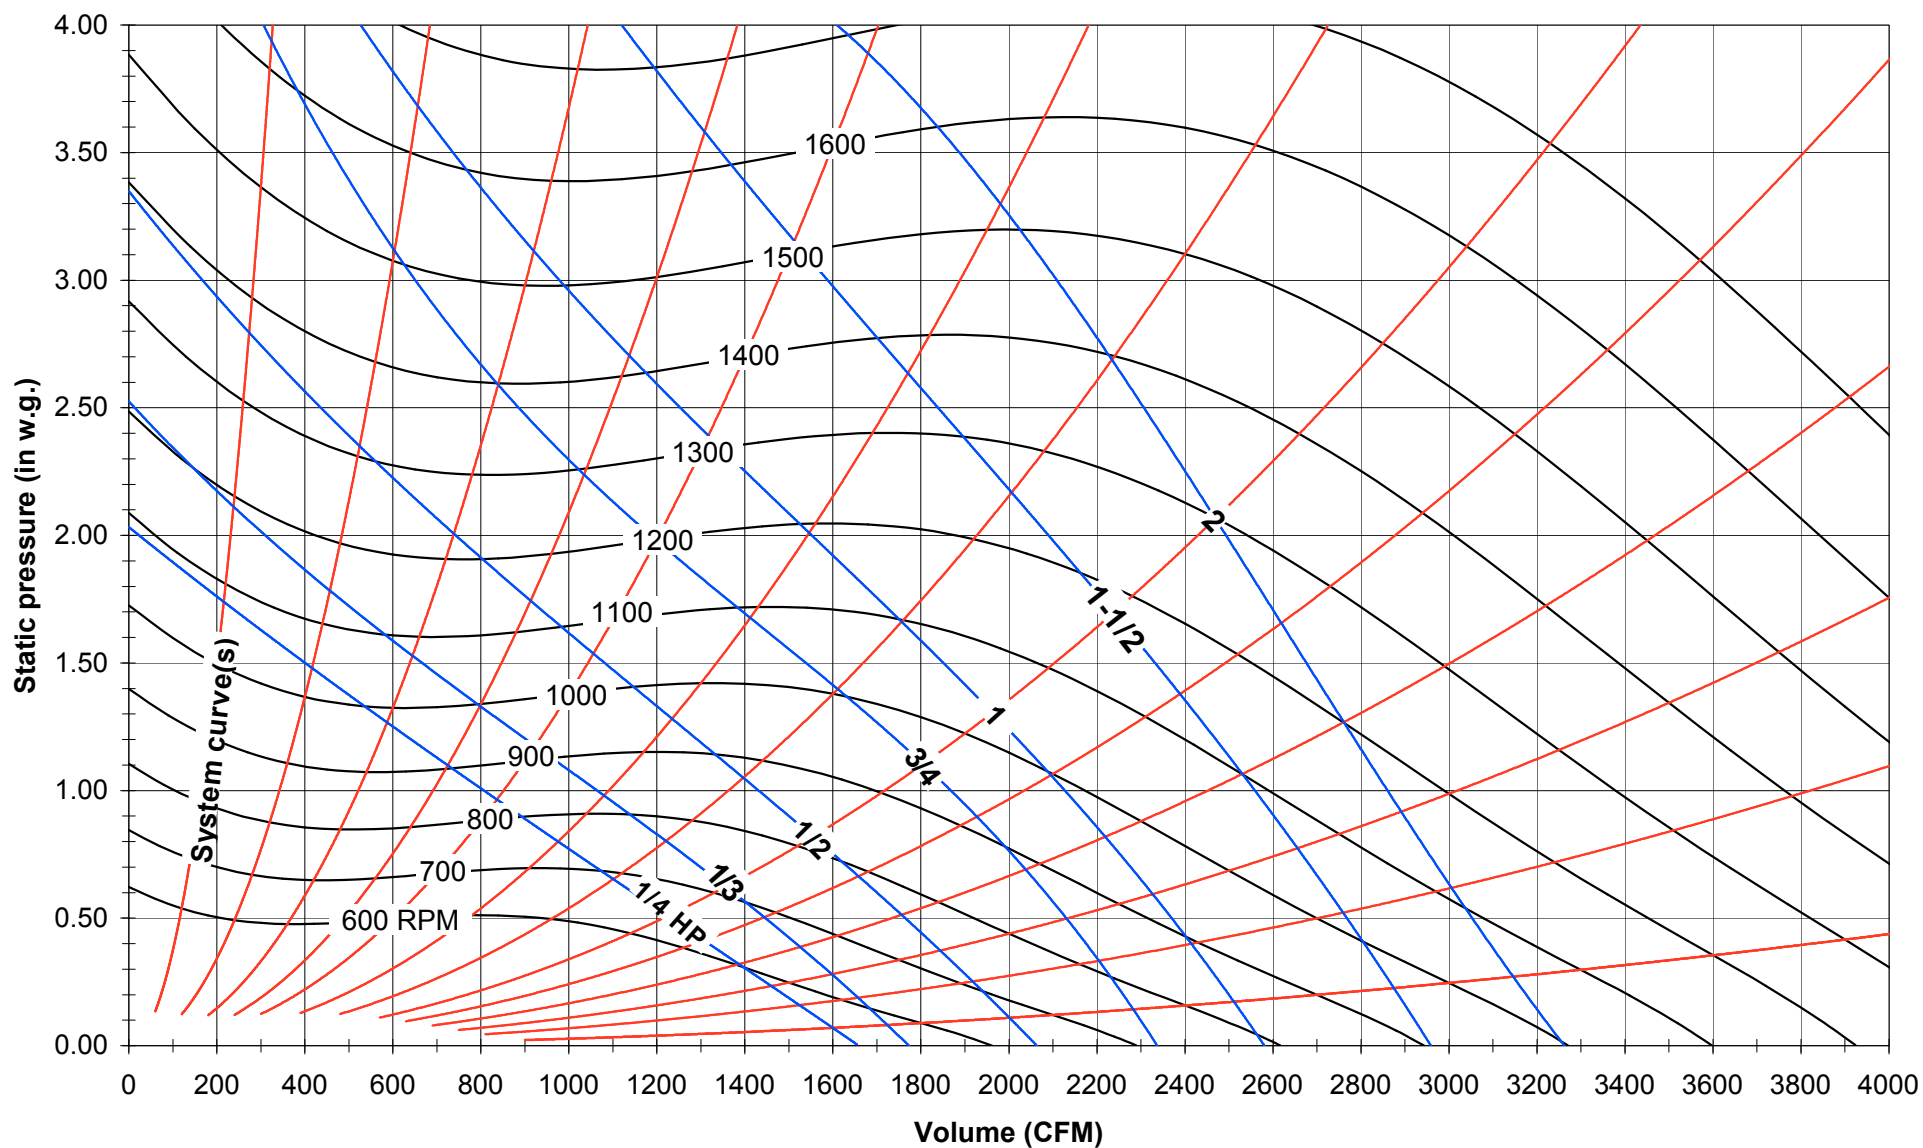

| | | |
|-------------|-------------|-------------|
| Model: | 415 | 615 |
| Max. HP: | 3 | 5 |
| Shaft dia.: | 1" | 1" |
| Max. RPM: | 1500 | 1500 |

Performance ratings shown were obtained in accordance with ANSI/AMCA Standard 210 and do not include the effects of accessories.
Outlet chamber setup – multiple nozzles; free inlet, ducted outlet.
BHP does not include drive losses. Standard Air Density .075 lb/ft³.

